




AMBITION CARPET TILES



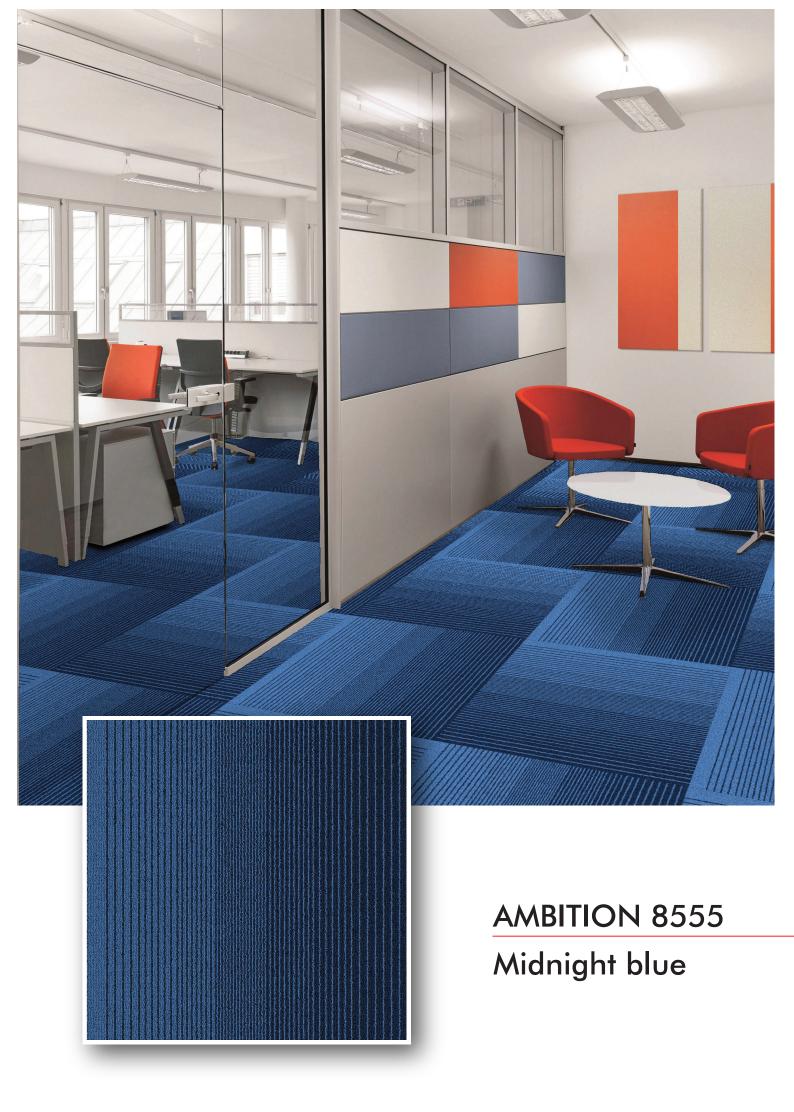

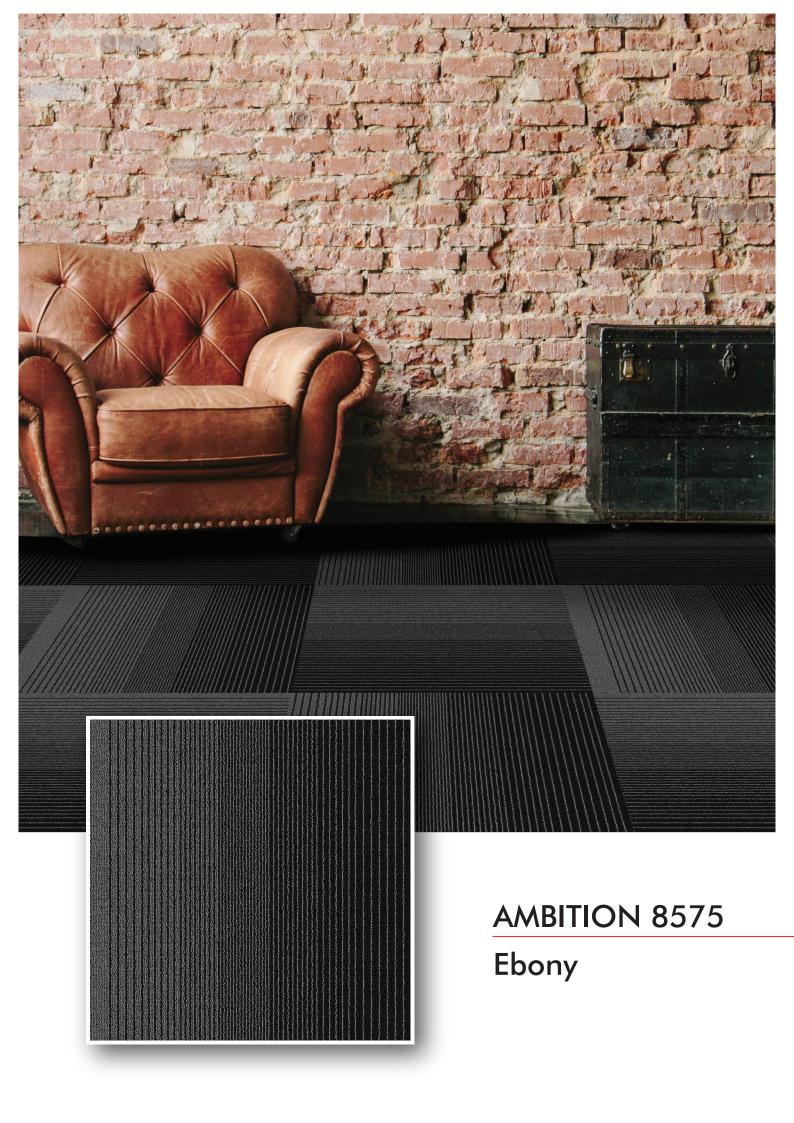

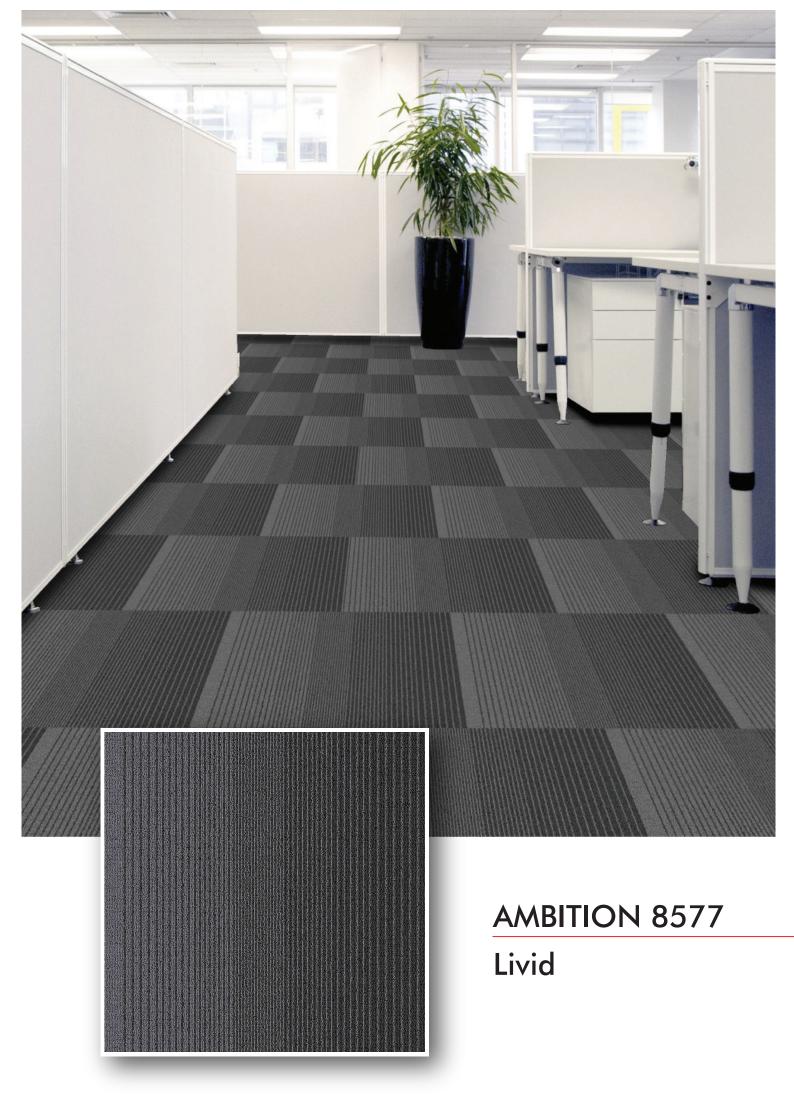

AMBITION CARPET TILES

Specification

Style Name : Ambition

Construction : Loop

Fiber : 100% Olefin

Yarn Type : Cable

Dye Method : Solution dyed

Gauge : 1/10 th
Pile Height : 3.5 mm
Total Height : 5.5 mm

Pile Weight : 600 gm per sqm (± 5%)

Number of Tufts : 169420/m2 Primary Backing : Non woven

Secondary Backing : Stableshield-100% vinyl

Tile Size : 50 cm X 50 cm

Packing : 20 Pcs(5M2) PER Box Installation Method : Quarter turn / Brick

Performance Parameters

WEAR CLASSIFICATION HEAVY CONTRACT

VOC EMISSION ASTM D5116-06 <0.5 mg/m²/hour (CRI GLP)

FLAMMABILITY ASTM D-2859//FF 1-70//16CFR 1630 Pass 8/8
CRITICAL RADIANT FLUX ASTM E648-08 Class 1
STATIC PROPENSITY ISO 6356 0.2 kV

SOILING PROPENSITY ASTM D 6540-00

DIMENSIONAL STABILITY EN 986 < 0.20% CASTOR CHAIR TEST DIN 54324 $R \ge 2.4$ SMOKE DENSITY EN ISO 9239-1:2002 < 450

























Product characteristics may vary due to the nature of manufacture. To combat colour variance do not install more than one dye lot in a single installation. A join line will be visible on plank and tile products due to the format of the design repeat - if you would not like a visiblejoin, alternate the direction of the installation to your desired aesthetic. Sample swatches have been cut from an overall design; therefore, the decoration and shades may vary. A difference in appearance from the pattern is likely, as the product is not intended to have a uniform appearance.