

CRACKED CEMENT




CRACKED CEMENT


CARPET TILES

CRACKED CEMENT


CARPET TILES

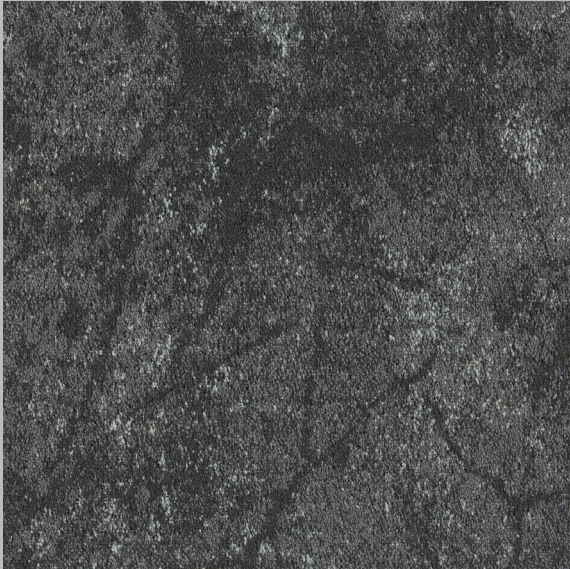


CRACKED CEMENT 401
FOSSIL

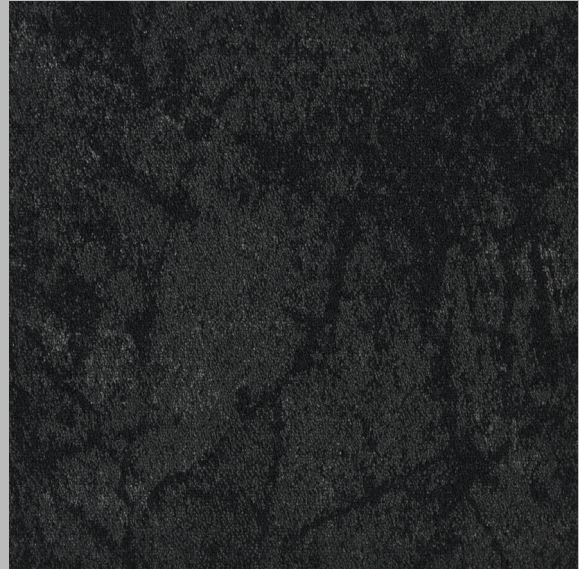

CRACKED CEMENT 402
WINTER GREY

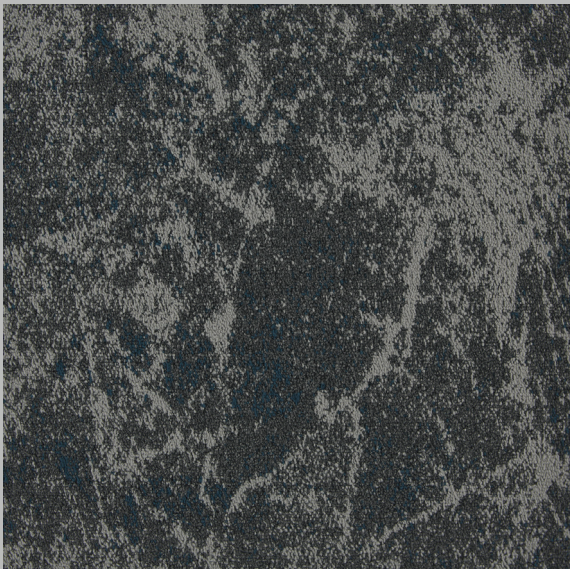

CRACKED CEMENT 403
COOL GREY

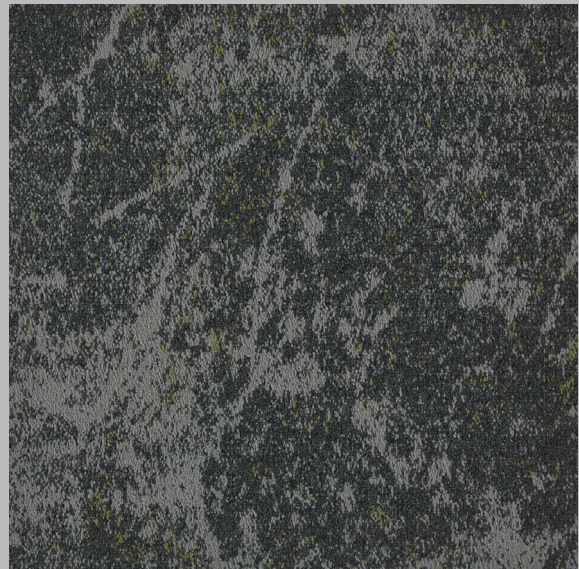

CRACKED CEMENT 404
CHAR GREEN

CRACKED CEMENT


CARPET TILES

Product Information

Construction	: Pattern Colour Placement
Yarn Type	: Stainproof SDX (Solution Dyed Nylon)
Use Classification	: Heavy Commercial
Pile Height	: 2 mm (± 0.5 mm)
Total Thickness	: 6 mm (± 0.5 mm)
Backing	: NexBac
Standard Sizing Available	: 50 x 50 cm
Machine Gauge	: 1/10"
Stitches/10cm	: 50
Total Mass	: ± 3900 g/m ²
Packing	: 20 Tiles (5 M2) In a Box
Fire Index	: Bfl - S1 (EN 13501) Class 1 (ASTM E648-08)

Colour Fastness To:

i) Light	: 7 (ISO 105 - B02)
ii) Rubbing	: (a) Wet 4 - 5 (ISO 105-X12) (b) Dry 4 - 5 (ISO 105-X12)
iii) Water	: 4 - 5 (ISO 105 - E01)
Electrostatic Propensity	: Less Than 2.0 kV (ISO 6356/EN 1307)
Static Control	: Permanent
Sound Absorption	: α_w 0.15
VOC Tested	: Pass
Recycled Content	: Backing – NexBac Eco (available on request only) Pile Yarn (Certain Colours only)

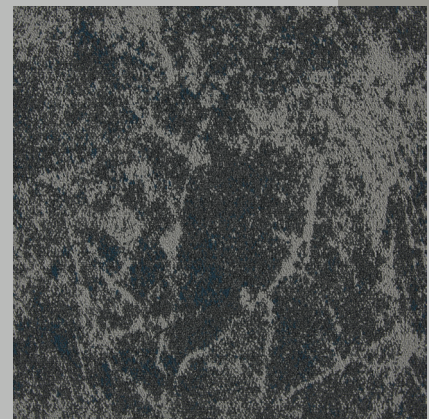

Staircase
Suitable



Underfloor
Heating



Medium/General
Commercial



Heavy
Commercial



Eco-Friendly



Institution



Hospitality



Modular