

# GRID



# GRID

CARPET  
TILES






## GRID 201

---

### Cloud Break



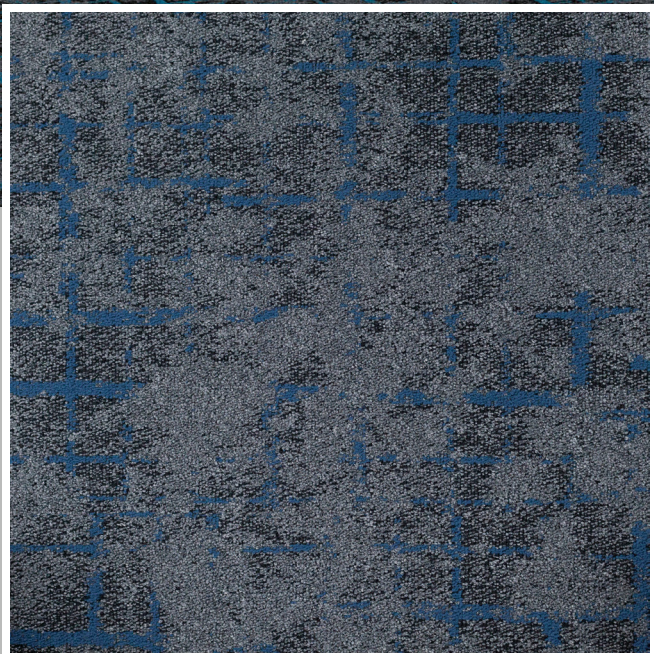

## GRID 202

---

### Horizon






## GRID 204

---

### Sunrise



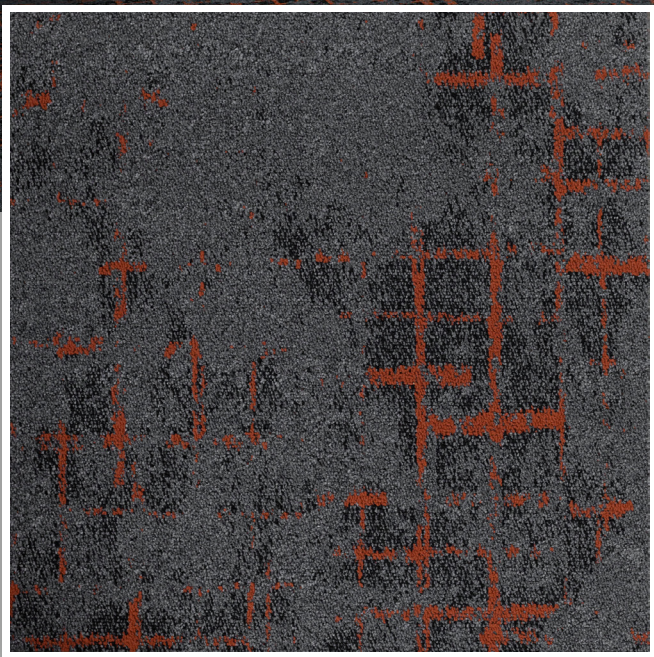

GRID 205

---

Sunset






## GRID 206

---

### Thunder



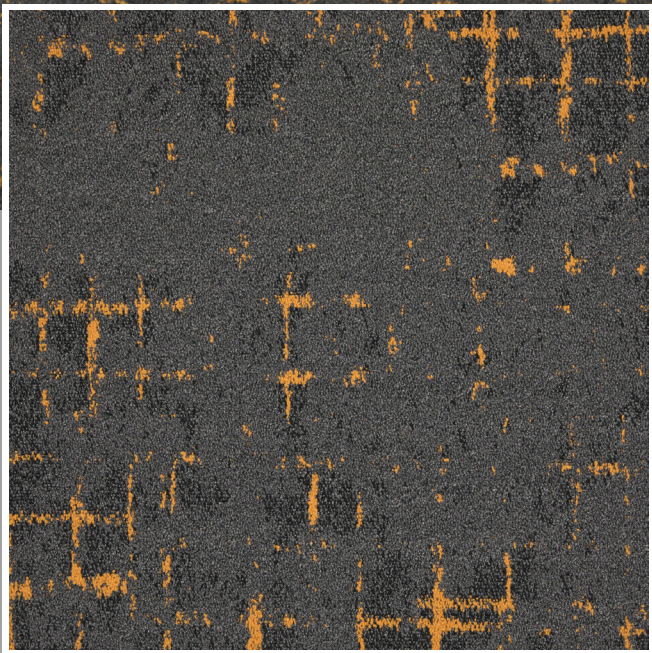


GRID 207

---

Vesper



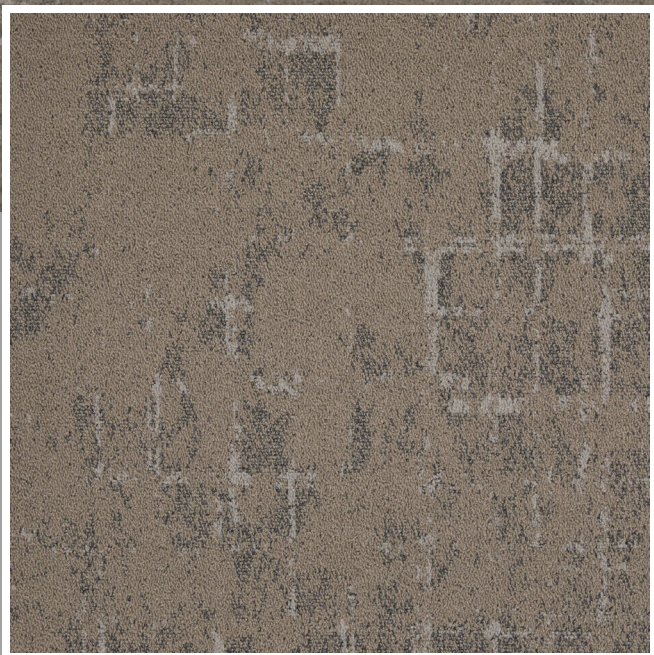


## GRID 208

---

### Dryland



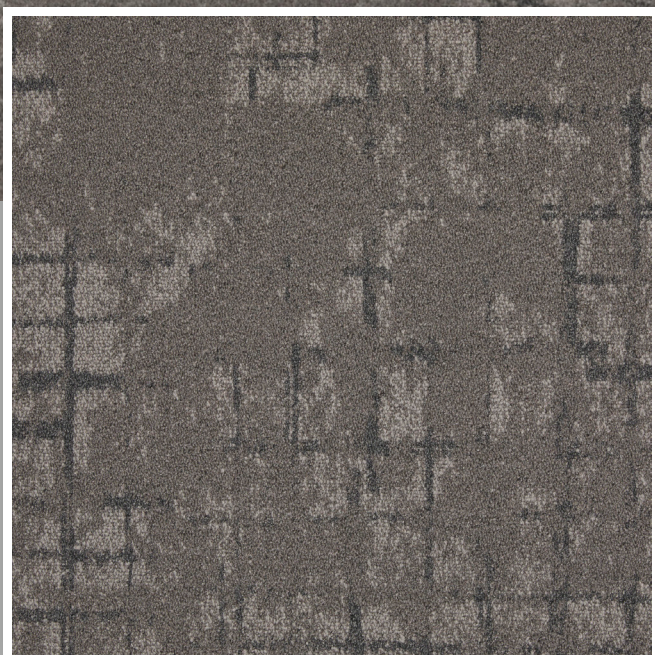


**GRID 209**  
**Headland**







GRID 201  
**CLOUD BREAK**

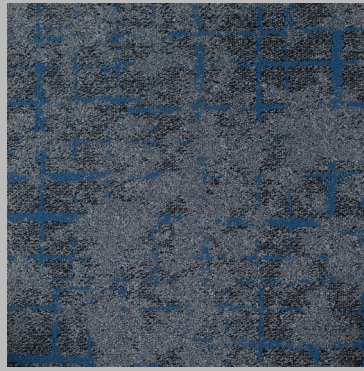


GRID 202  
**HORIZON**

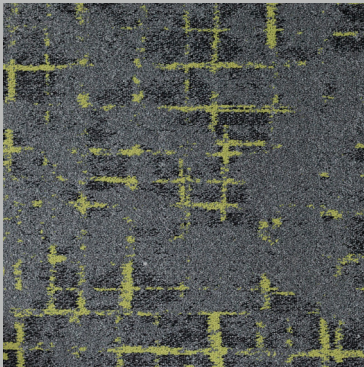


GRID 204  
**SUNRISE**

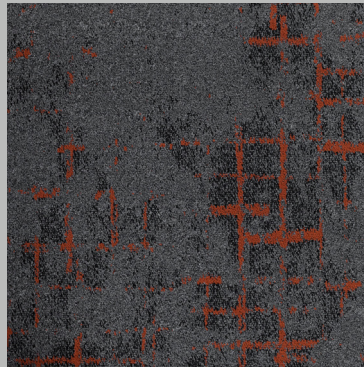

GRID 205  
**SUNSET**

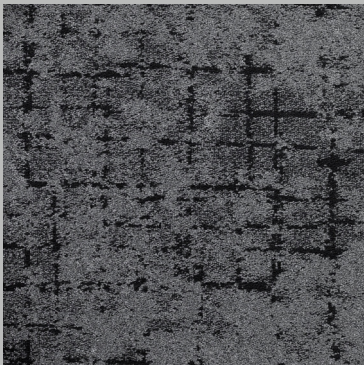


GRID 206  
**THUNDER**

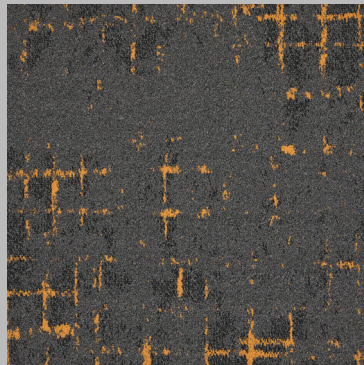

GRID 207  
**VESPER**



GRID 208  
**DRYLAND**

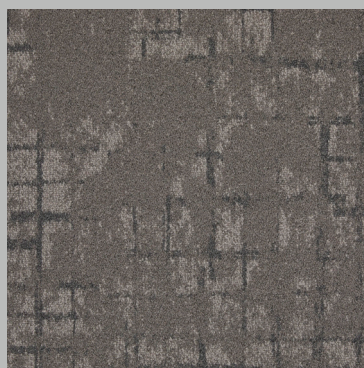

GRID 209  
**HEADLAND**



Staircase  
Suitable



Eco-Friendly



Underfloor  
Heating



Institution



Medium/General  
Commercial



Hospitality



Heavy  
Commercial



Modular



Product characteristics may vary due to the nature of manufacture. To combat colour variance do not install more than one dye lot in a single installation.

A join line will be visible on plank and tile products due to the format of the design repeat. If you would not like a visible join, alternate the direction of the installation to your desired aesthetic.

Sample swatches have been cut from an overall design; therefore, the decoration and shades may vary. A difference in appearance from the pattern is likely, as the product is not intended to have a uniform appearance.



# GRID CARPET TILES

## *Product Information*

---

|                           |                                                                    |
|---------------------------|--------------------------------------------------------------------|
| Construction              | : Tufted Pattern Colour Placement Loop Pile                        |
| Yarn Type                 | : Stainproof SDX (Solution Dyed Nylon)                             |
| Use Classification        | : Heavy Commercial                                                 |
| Pile Height               | : 4 mm ( $\pm 0.5$ mm)                                             |
| Total Thickness           | : 5 mm ( $\pm 0.5$ mm)                                             |
| Backing                   | : NexBac Only                                                      |
| Standard Sizing Available | : 50 x 50 cm                                                       |
| Machine Gauge             | : 1/10"                                                            |
| Stitches/10cm             | : 50                                                               |
| Total Mass                | : $\pm 3900$ g/m <sup>2</sup>                                      |
| Packing                   | : 20 Tiles (5 M <sup>2</sup> ) In a Box                            |
| Fire Classification       | : 2 (SANS 10177-4), Bfl - s1 (EN 13501),<br>Class 1 (ASTM E648-08) |

### Colour Fastness To:

|                                |                                                                                              |
|--------------------------------|----------------------------------------------------------------------------------------------|
| i) Light                       | : 8 (AATCC16 / ISO 105 - B02)                                                                |
| ii) Rubbing (change of colour) | : 4/5 (AATCC 165/ISO 105 X 12)                                                               |
| iii) Rubbing (staining)        | : 5 (AATCC 165/ISO 105 X 12)                                                                 |
| Electrostatic Propensity       | : $\leq 2$ kV (ISO 6356/EN 1307)                                                             |
| Static Control                 | : Permanent                                                                                  |
| Sound Absorption               | : $\alpha_w$ 0.15 (EN ISO 354:2003)                                                          |
| Sound Insulation               | : $\Delta L_w$ 18 dB (ISO 717-2)                                                             |
| Thermal Resistance             | : 0.0638 m <sup>2</sup> .K/W (ISO 8302)                                                      |
| Dimensional Stability          | : Pass (NF EN 986)                                                                           |
| VOC Tested                     | : Pass (GBCSA/GBCA)                                                                          |
| Castor Chair Suitability       | : A: Intense Use (NF EN 985)                                                                 |
| Recycled Content               | : Yarn – Stainproof SDX Eco - Certain Colours<br>Backing – EcoBac 300 (S3) & EcoBac 500 (S5) |





# GRID

**UAE** — **Bahrain**

Warehouse No: 11 B1 Khansaheb Warehouse,  
Al Qusais Industrial Area 1, P.O. Box: 19243  
Dubai - United Arab Emirates

+971 4 258 1388  
[marketing@redmagmauae.com](mailto:marketing@redmagmauae.com)  
[www.redmagmauae.com](http://www.redmagmauae.com)