

HARD GRAFT



Hard Graft
Chill 301

HARD GRAFT


CARPET TILES



Hard Graft
Chill 301



Hard Graft
Deep 302

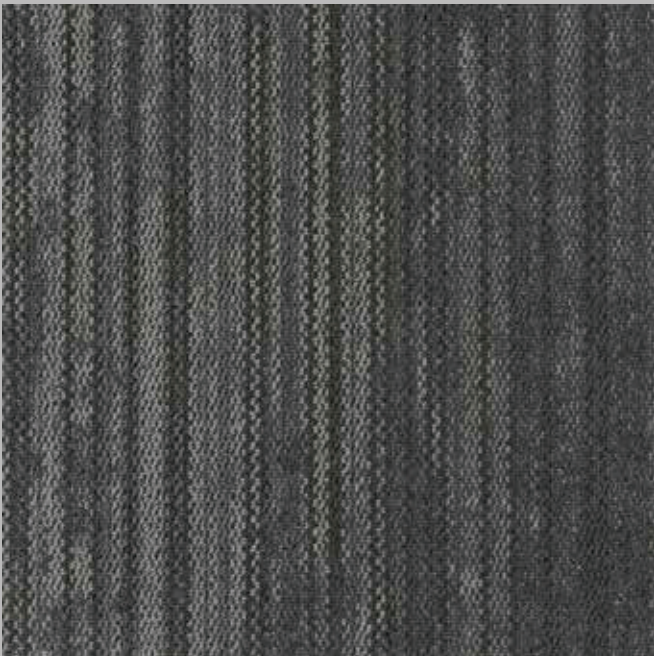

Hard Graft
Edge 303



Hard Graft
Hype 304

HARD GRAFT

CARPET TILES

Specification

Construction	: Tufted Multi Scroll Loop Pile.
Product Description	: General / Medium Commercial Polypropelene Tufted Loop Pile Bitumen Tile
Yarn Type	: Stainproof Miracle Fibre (Polypropylene)
Recycled Content	: Backing (NexBac Eco / EcoBac on request only)
Use Classification	: General / Medium Commercial
Pile Height	: 2.5 mm to 5.5 mm (± 0.5 mm)
Total Thickness	: ± 7 mm
Total Mass	: ± 4100 g/m ²
Standard Size	: 50 cm x 50 cm
Machine Gauge	: 1/10"
Stitches	: 39
Packing	: 20 Tiles (5 M2) In a Box
Fire Index	: 2 (SANS 10177-4)

Colour Fastness To:

i) Light	: 7 (ISO 105-B02)
ii) Rubbing	: (a) Wet 4-5 (ISO 105-X12)
iii) Rubbing	: (b) Dry 4-5 (ISO 105-X12)
iv) Water	: 4-5 (ISO 105-E01)
Electrostatic Propensity	: Less than 2.0 kV (EN 1307)
Static Control	: Permanent
VOC Tested	: Pass



Product characteristics may vary due to the nature of manufacture. To combat colour variance do not install more than one dye lot in a single installation. A join line will be visible on plank and tile products due to the format of the design repeat-if you would not like a visible join, alternate the direction of the installation to your desired aesthetic. Sample swatches have been cut from an overall design; therefore, the decoration and shades may vary. A difference in appearance from the pattern is likely, as the product is not intended to have a uniform appearance.



Hard Graft
Edge 303

HARD GRAFT