

MAGNET




MAGNET

CARPET
TILES




MAGNET 1645

Johannesburg

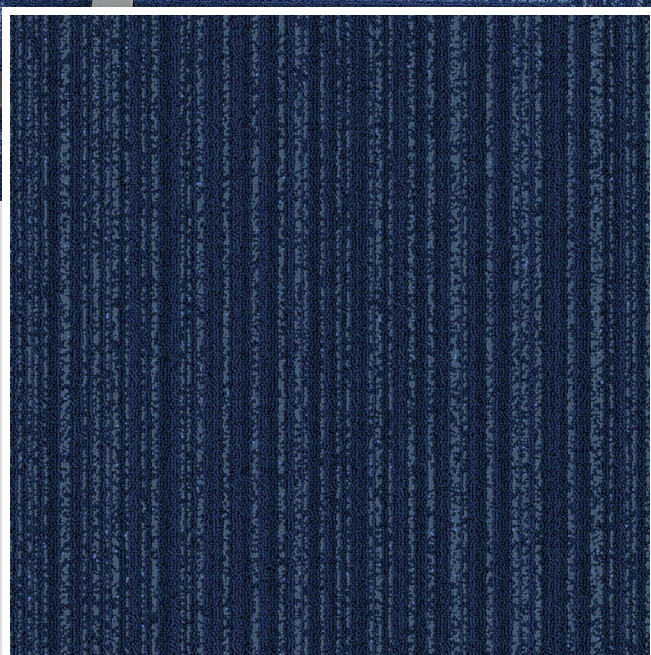


MAGNET 1656

Kimberley

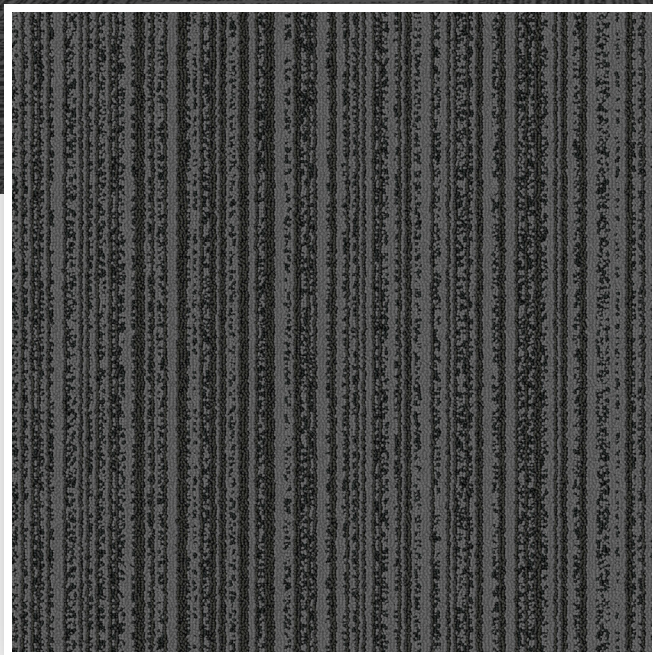

MAGNET 1674

Durban

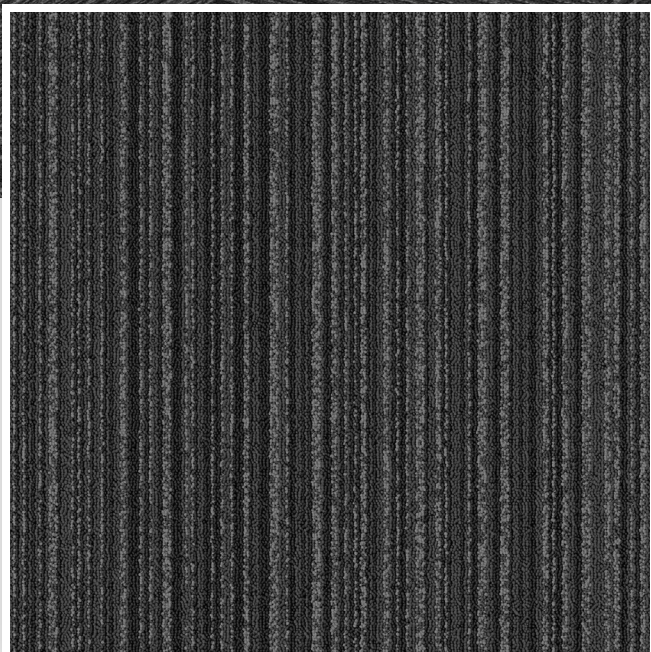

MAGNET 1675

Cape Town

MAGNET

CARPET TILES


Product Information

Style Name	: Magnet
Construction	: Loop
Fiber	: 100% Olefin
Yarn Type	: Cable
Dye Method	: Solution Dyed
Gauge	: 1/10 th
Pile Height	: 3.5 mm
Total Height	: 5.5 mm
Pile Weight	: 600 gm Per sqm ($\pm 5\%$)
Number Of Tufts	: 169420/m ²
Primary Backing	: Non Woven
Secondary Backing	: Stableschild- 100% Vinyl
Tile Size	: 50 X 50 cm
Packing	: 20 Pcs (5m ²) Per Box
Installation Method	: Quarter Turn



Technical Performance

Wear Classification	Heavy Contract	
Voc Emission	ASTM D5116-06	<0.5 mg/m ² /hour (CRI GLP)
Flammability	ASTM D-2859/FF 1-70//16CFR 1630	Pass 8/8
Critical Radiant Flux	ASTM E648-08	Class 1
Static Propensity	ISO 6356	0.2 kV
Color Fastness	AATCC/16	5/5 on Grey Scale
Thermal Resistance	ISO 8302	.04 m ² K/W
Impact Sound Insulation	ISO 140-8	ΔL_w : 23dB
Sound Absorption Level	EN ISO 11654	aw: 0.15(H)
Soiling Propensity	ASTM D 6540-00	4
Dimensional Stability	EN 986	< 0.20%
Castor Chair Test	DIN 54324	R $\geq$ 2.4
Smoke Density	EN ISO 9239-1:2002	<450





MAGNET

MAGNET
CARPET TILES